

**TECHNICAL REPORT ON STUDENT INDUSTRIAL WORK
EXPERIENCE SCHEME (SIWES)**

AT

**PHYSICAL PLANNING DIRECTORATE, FEDERAL POLYTECHNIC,
MUBI, ADAMAWA STATE**

FROM: 6TH OCTOBER, 2024

TO: 29TH JANUARY, 2025

BY

YUSUFU LAWRENCE

(SE/ARC/ND/23/010)

**SUBMITTED TO THE DEPARTMENT OF ARCHITECTURAL
TECHNOLOGY, FEDERAL POLYTECHNIC MUBI, IN PARTIAL
FULFILLMENT OF THE REQUIREMENT FOR THE AWARD OF
NATIONAL DIPLOMA (ND) IN ARCHITECTURAL TECHNOLOGY**

APRIL, 2025

DECLARATION

This is to declare that I, Yusufu Lawrence with registration number SE/ARC/ND/23/010 undertook my four months SIWES at Physical Planning Directorate, Federal Polytechnic, Mubi, Adamawa State and have acquired all the experience compiled in this report in the course of my SIWES.

.....

YUSUFU LAWRENCE

.....

Sign/Date

CERTIFICATION

This is to certify that this report compiled by Yusufu Lawrence (SE/ARC/ND/23/010) meets the regulations of governing the award of National Diploma (ND) of the Federal Polytechnic Mubi, and is approved by:

.....

Name of Supervisor

Departmental Supervisor

.....

Date

.....

Arc. Dangana T. Halla

Departmental SIWES Coordinator

.....

Date

.....

Arc. Usman Mohammed

Head of Department

.....

Date

DEDICATION

I dedicate this project to Almighty God and to my beloved parents.

ACKNOWLEDGEMENTS

I thank God Almighty for making me to undergo students industrial work experience scheme (SIWES) successfully.

My gratitude goes to my parent for their prayers, financial and moral support during my attachment.

I also appreciate the kind gesture of my brothers and sisters and those who supports me in prayers and contribution during my industrial attachment.

I whole heartedly thank my Head of department Arc. Usman Mohammed, SIWES coordinator and all lecturers of Architectural Technology for their effort to ensure my success as their students.

I am greatly indebted to my co-SIWES students to mention, may God strengthen our relationship together and grant us academic excellence.

I sincerely thank you all for your contribution and support.

TABLE OF CONTENTS

TITLE PAGE.....	i
DECLARATION.....	ii
CERTIFICATION.....	iii
DEDICATION.....	iv
ACKNOWLEDGEMENT.....	v
TABLE OF CONTENTS.....	vi
ABSTRACT.....	viii

CHAPTER ONE

1.0 Introduction.....	1
1.1 Aims and Objectives of SIWES.....	1
1.2 Brief history of SIWES.....	2
1.3 Significance of SIWES.....	3

CHAPTER TWO

2.1 Brief History of Organization.....	4
2.2 Organogram.....	5

CHAPTER THREE

3.0 Description of work experience.....	6
3.1 Site layout.....	6
3.2 Site clearing.....	7
3.3 Setting out.....	7
3.4 Excavation on foundation.....	8
3.5 Block work.....	11

3.6	Architectural designs.....	11
-----	----------------------------	----

CHAPTER FOUR

4.0	Summary, Recommendation and Conclusion.....	19
4.1	Problems observed during my program.....	19
4.2	Summary.....	19
4.3	Conclusion.....	20
4.4	Recommendations.....	20
	Reference.	21

ABSTRACT

The report summarises the result of work done during my SIWES experience, the technical report consists of four chapters, which comprises of introduction, history and criteria's of SIWES in chapter one followed by their aims and objectives, historical background, organizational structure of the organization in chapter two, while chapter three consist of the work actually carried out during the SIWES programme and lastly chapter four consist of the summary, conclusions and recommendation.

CHAPTER ONE

1.0 INTRODUCTION

The acronym (SIWES) meaning “Student Industrial Work Experience Scheme” is a skill training designed to expose and prepare student in institution of higher for industrial working situation they may likely meet after graduation. The scheme is meant to train student on the method of work and the experience needed in handling the equipment and machines may not to be available in their institution. The scheme is financed by the Federal Government and operators through Industrial Training Fund (ITF), Ogwo, (2001) and operates with National University Commission (NUC), National Board of Technical Education (NABTEC), and National Commission for College of Education (NCCE) and industries. However, SIWES also expose the student to many practical works which the institution did not treat in details without plastering what the institution taught theoretically into practical. A point from academic obtained. SIWES assist the student to understand the nature of his/her work in future.

1.1 Aim and objective of SIWES

ITF initiates SIWES with the sole aim of: Exposing student with the practical experience related to the theoretical knowledge acquired in school. Bridging the gap between theoretical learning and practical work situation.

- i. To make industries/organization to have confidence in the abilities and capacities of the graduates. SIWES helps the industries to evaluate the prospective employees and give feedback to the institution.
- ii. It helps the student to gain work and also have experience and confidence as a result of successful completion of a given job assigned to them.
- iii. To enlist and strengthen the employers' involvement in the institution activities and in the entire educational process of preparing the student for meaningful and productive employment into industries.
- iv. It provides an avenue for student in the Nigerian University and Polytechnics to acquire industrial skill and experience in their course of study.
- v. Development for greater understanding in other people and proffers skills in human relations.

1.2 Brief history of SIWES and ITF in Nigeria

It was said by Dr. Azikiwe Nnamdi, the one president of Nigeria that the practice of work but they all have the same goal that they all want to achieve in countries like china. They established within the premises of institution to provide real life situation, lack of practical skill of locally trained engineers and technologies. the chine way and condition of SIWES is that all institution must give student real life working experience in industrial works. Lecturers are involved in the industrial activities rendering constant services. So, all these countries have their own way of conducting the scheme but all lye on the same goal. And in Nigeria, the history of SIWES can be

traced by the history of IITF which is the backbone of SIWES. ITF was established in 1974 under degree of 47 of 1971. It was a body established by the Federal Government of Nigeria and was given responsibility of training indigenous Nigerians. The establishment of the body became necessary due to high demand of Nigeria to take up the vacant positions created in various sector of the economy after the colonial masters have departed. Therefore, the Federal Government discovered that it is easier to train students that are skilled in school to be trained and meet up with gaps in the Nigerian economy and a scheme was established to care for such training and it was named Student Industrial Work Experience Scheme (SIWES). In 1973, the national board of technical education (NBTE) made it compulsory for all the polytechnic students, be it federal or state.

1.3 Significance of SIWES to students

Principles taught in the classroom are vein forced given concrete applications on the industrial assignment and students is able to see the relevance of their students which increase their motivation. It helps in given students the knowledge on the types of work to do after his/her graduation. SIWES given students opportunity for a change of environment as they move their institution to the place of attachment which changes the routine types of environment to a word of work. It helps in connecting the institution and the industrial their relationship the introduction of SIWES.

CHAPTER TWO

2.1 BRIEF HISTORY OF PHYSICAL PLANNING DIRECTORATE, FEDERAL POLYTECHNIC, MUBI, ADAMAWA STATE

The Physical Planning Directorate, Federal Polytechnic, Mubi, Adamawa State, was established in the year 2009, with the sole aim of planning, design, construction and supervision of new project in the Federal Polytechnic, Mubi be it in contract or direct labour. And procurement and preparation of land document.

The following are some units in the Physical Planning Directorate, Federal Polytechnic, Mubi;

Architecture: Responsible for design and supervision of construction works in the Polytechnic.

Civil Engineering: Responsible for the supervision of construction of structural element during construction.

Building Tech: Responsible for supervision and quality control.

Town planning: Planning and maintaining the layout plan of the polytechnic.

Quantity surveyor: Participates in tendering, preparation of contract document, valuation etc.

Craft men: Assist the professional in carrying out their duties

Admin: The Administrative staff supports all the staff in the directorate.

2.2 COMPANY ORGANOGRAM

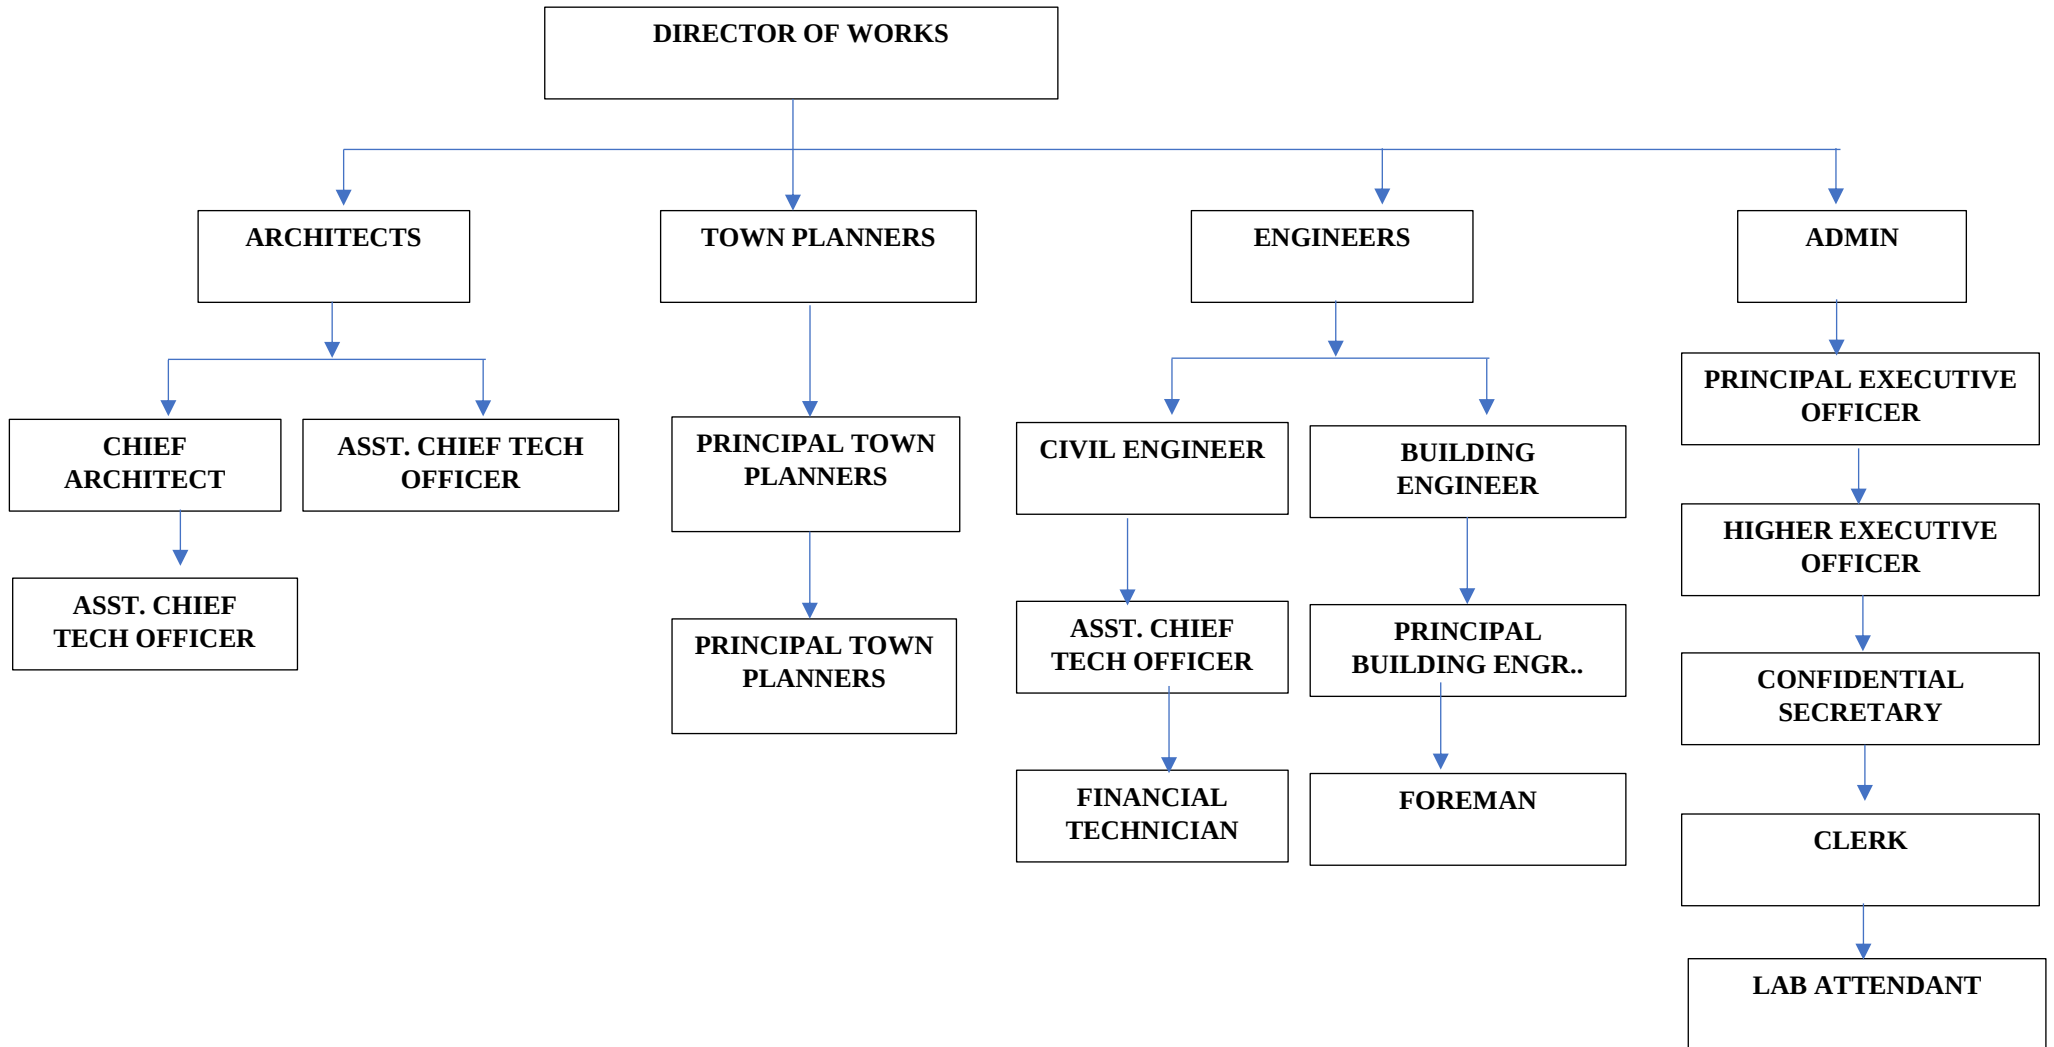


Figure 2.1: Organogram

CHAPTER THREE

3.0 DESCRIPTION OF WORK EXPERIENCE

3.1 SITE CLEARANCE

For the site clearance process, our team took several key steps to ensure the site was ready for construction. First, we gathered all necessary equipment, including shovels, chainsaws, and safety gear, and reviewed the site plan to ensure we understood the requirements. We made sure to obtain the necessary permits and took the time to discuss safety precautions. Next, we cleared the vegetation, carefully handling any environmentally sensitive plants. Construction debris and obstacles like rocks and concrete slabs were removed using heavy machinery, ensuring the site was free of obstructions. Excavation and grading were carried out to level the site and guarantee proper drainage for a solid foundation. Throughout the process, we managed waste responsibly, disposing of both hazardous and non-hazardous materials according to regulations. Finally, a thorough inspection was performed to ensure the site was clean, safe, and fully prepared for the next phase of development.

3.2 SETTING OUT

345 method are used for the setting out, as observed after 90 from all angles using the pages ropes string and also from the plan.

Setting out is done with high degree of accuracy or else the building will not last as the engineer answered to my question “why are some calculations made during setting out”.



Plate 3.1: Setting out using profile board

Source: Author's work, 2023

3.3 EXCAVATION OF FOUNDATION

Excavation can be defined as the process of digging a soil surface or trench for foundation lay into trench.

It is also the process of removing top soil for foundation trenches. Excavation work is an important part of building operation that commences immediately after setting out the width of excavation for foundation trenches is marked out on the profile and then transferred to the ground. Excavation must be carried out carefully to ensure safety of workers.

Excavation can be done using two methods mechanical and manual. In small construction we normally use manual method while in large construction we use mechanical e.g. like road construction.

Excavation work were carried out manually where unskilled labourer where involved with digger, shovels, head pan and wheel barrow. The following factors must be considered when carrying out any excavation work.

- i. Nature of the soil
- ii. The width and depth of foundation
- iii. Climatic condition at the time of excavation
- iv. The water table of the soil
- v. The period excavation work is expected to be left open.
- vi. The effect of excavation on existing adjacent structure.

As the engineer and the former goes to set basket, I was keeping an eye on how the beams were set. When digging the basket some places were 1.2 while some other places were 1.4 by 1.4 because of the type of soil on the site. When putting the basket in a poor soil, cement and sharp sand is mixed out before putting the basket to avoid rusting.



Plate 3.2: Excavation

Source: Author's work, 2023

3.4 LINTEL CONSTRUCTION

After completing the blockwork up to the required height for doors and windows, we proceeded with the construction of lintels—a critical phase in providing structural support above all openings. The process began with the marking and measurement of all door and window openings to determine the exact length of each lintel. Once the dimensions were confirmed, the carpenters constructed the formwork (shuttering) for the lintels using strong timber, ensuring it was firmly braced and properly aligned.

Next, we tied the reinforcement bars according to the structural drawings. These bars were essential for strengthening the lintel and distributing the load above the openings. Spacers were used to maintain cover between the reinforcement and the formwork, which helps protect the steel from corrosion. Once the reinforcement was fixed and inspected by the engineer, we proceeded to pour concrete into the lintel formwork. The concrete mix was properly proportioned and vibrated to remove air pockets and ensure proper bonding and compaction. The top of the lintel was leveled and finished neatly using a trowel. After pouring, the lintels were left to cure and gain strength, and we kept the surface moist regularly to aid the curing process. The formwork was not removed until the concrete had fully set and reached the required strength, usually after 7 to 14 days. This stage was particularly important as the lintels help in transferring the loads from above openings to the supporting walls on both sides. Being part of this process helped me understand the importance of accuracy, proper formwork, and reinforcement placement in lintel construction.

3.4 BLOCK WORK

Blocks were molded in a number of sizes, various compositions, strengths, and shapes such as 9 inches and 6 inches. The 9-inch blocks were used for external walls, while the 6-inch ones were for internal walls. After the foundation work was finished, the blockwork was built to cover the spaces as well. All the blockwork did not carry any load; they were erected to cover spaces and also act as partition walls.

Procedure

- i. Before starting the block laying process, the site was prepared by clearing debris and ensuring a level foundation.
- ii. The layout of the walls or structure was marked using chalk lines or strings to guide the placement of the blocks.
- iii. Blocks or bricks were selected based on the desired strength, size, and aesthetic requirements of the project.
- iv. Mortar was mixed according to the specifications, typically using a combination of cement, sand, and water.
- v. A layer of mortar was spread evenly along the foundation where the first course of blocks would be placed.
- vi. A level was used to check the horizontal and vertical alignment of the blocks.
- vii. Once the first course was laid, additional courses of blocks were added on top, following the same process.
- viii. Each block was buttered with mortar on its ends before being placed to ensure a strong bond between the blocks.
- ix. Blocks may have needed to be cut to fit around corners, openings for doors or windows, or to maintain the desired pattern.
- x. Excess mortar was scraped off the joints using a trowel, and any gaps or voids were filled to create a smooth, uniform surface.
- xi. Once the block laying was complete, the work area was cleaned up, and any excess materials or debris were removed from the site.

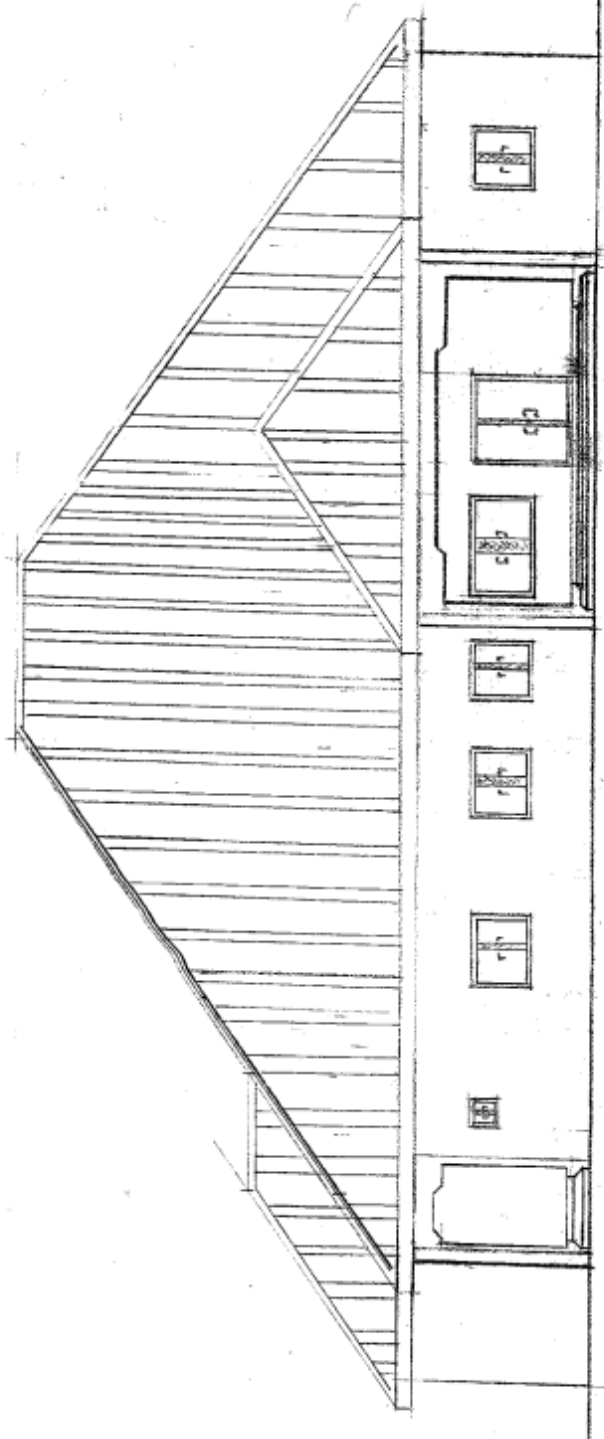


Plate 2: Block work

Source: Author's work, 2024


3.5 ARCHITECTURAL DESIGNS


During my SIWES, I was able to design a floor plan, lining room, dining area with section and elevation. Fine attached.





FRONT ELEVATION

Roof plan

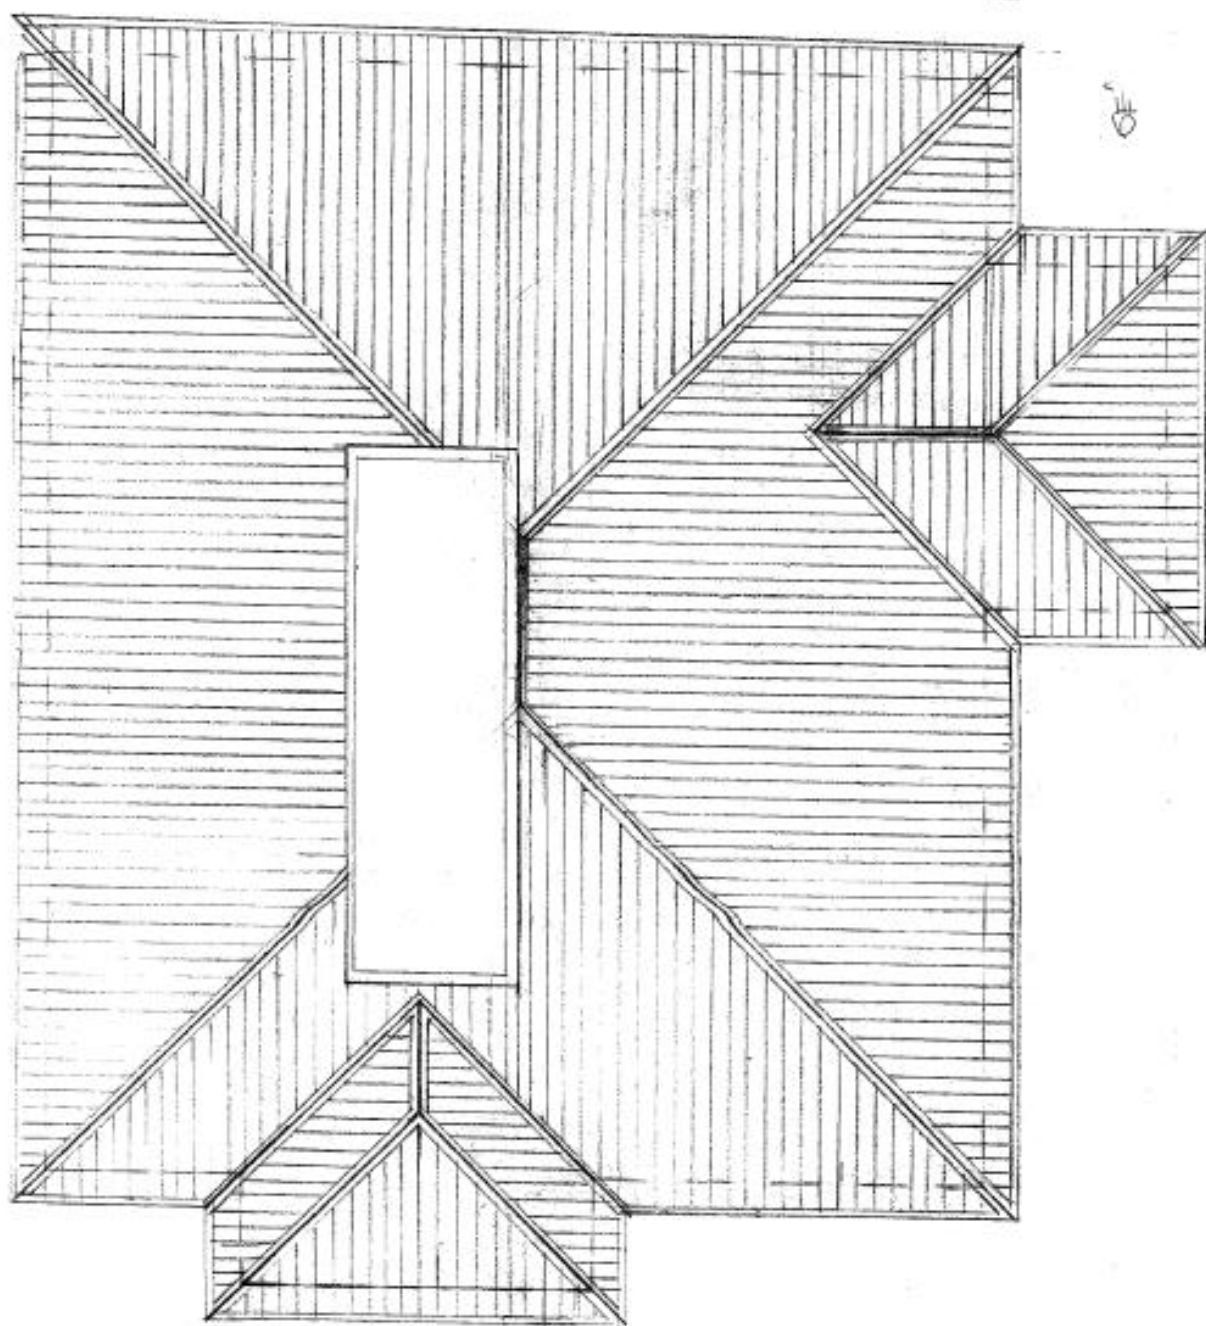


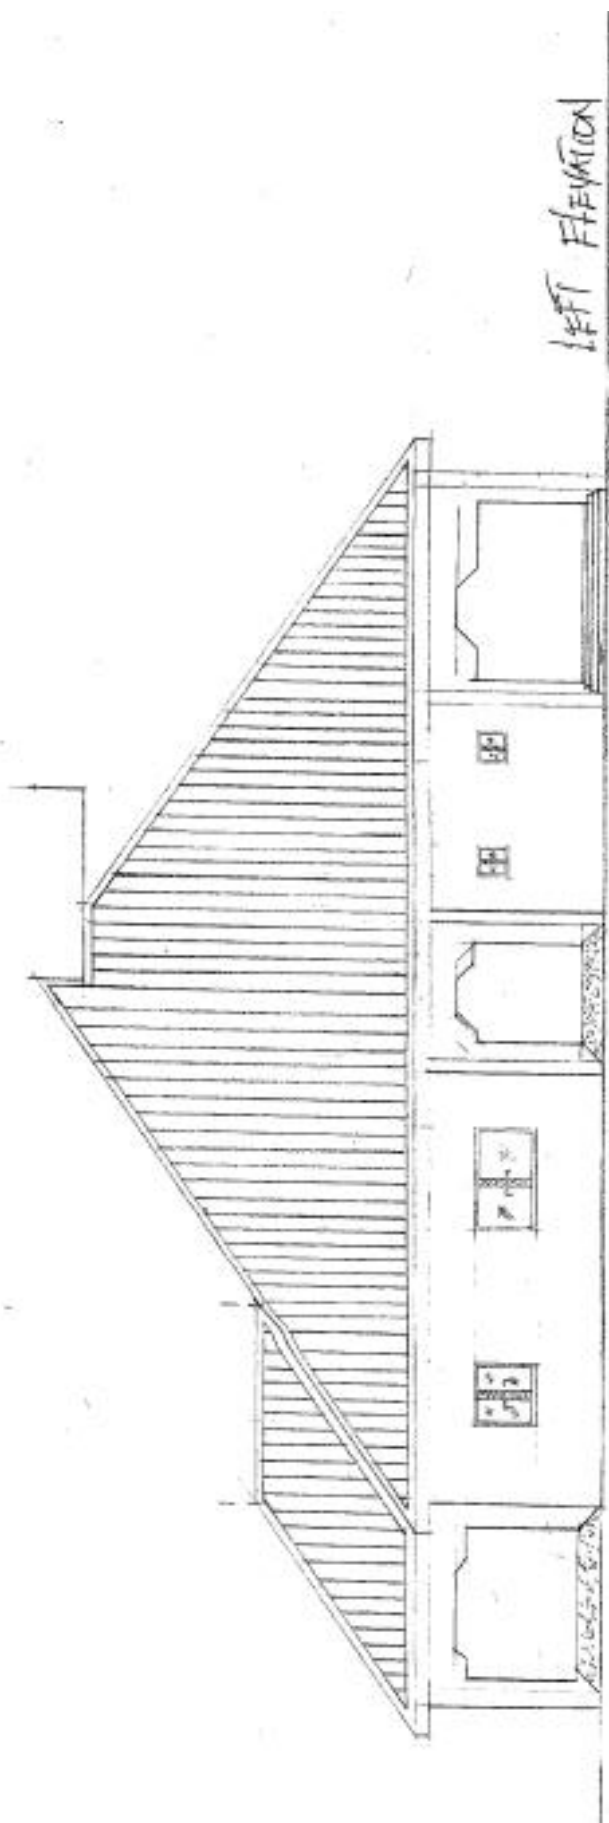

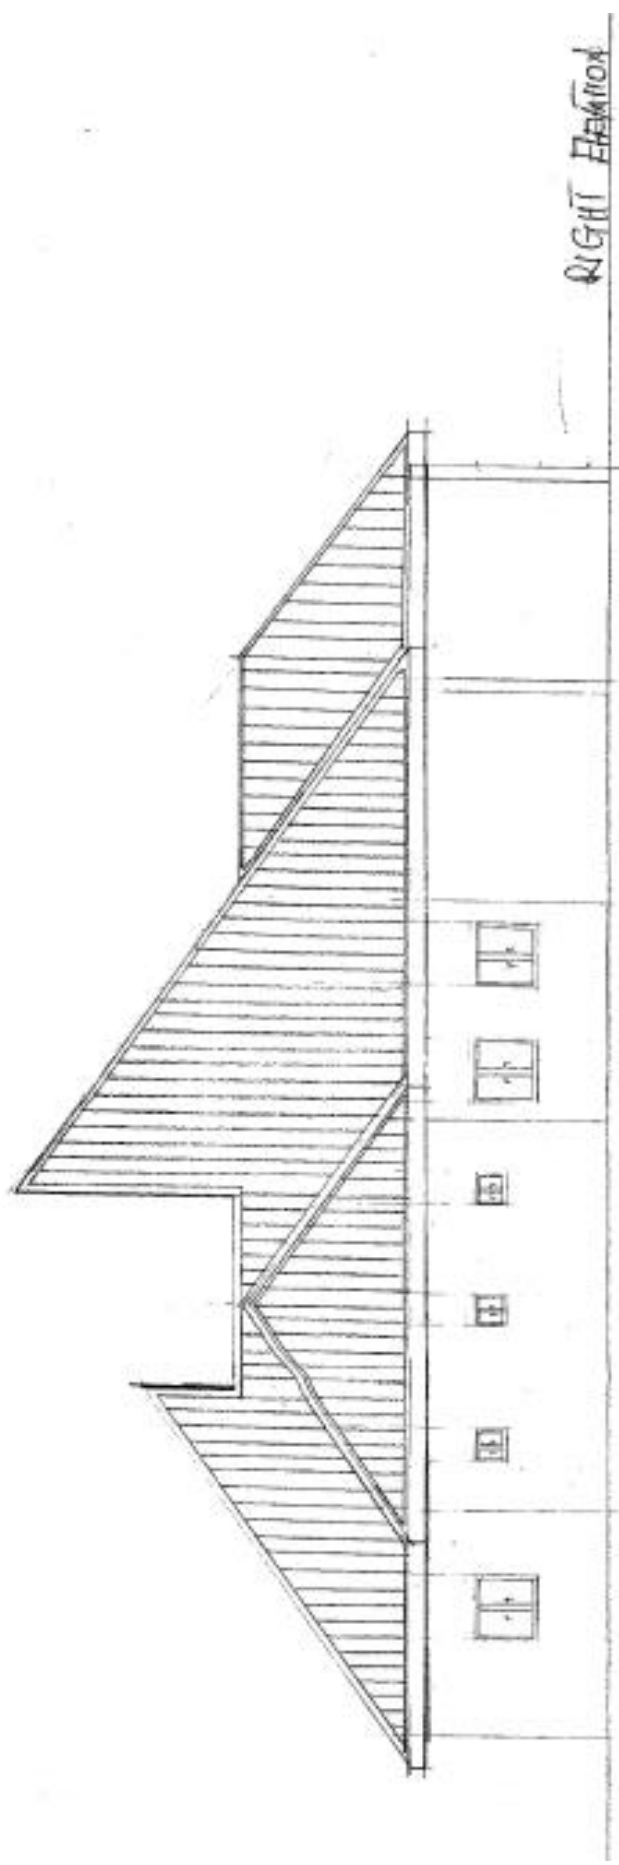

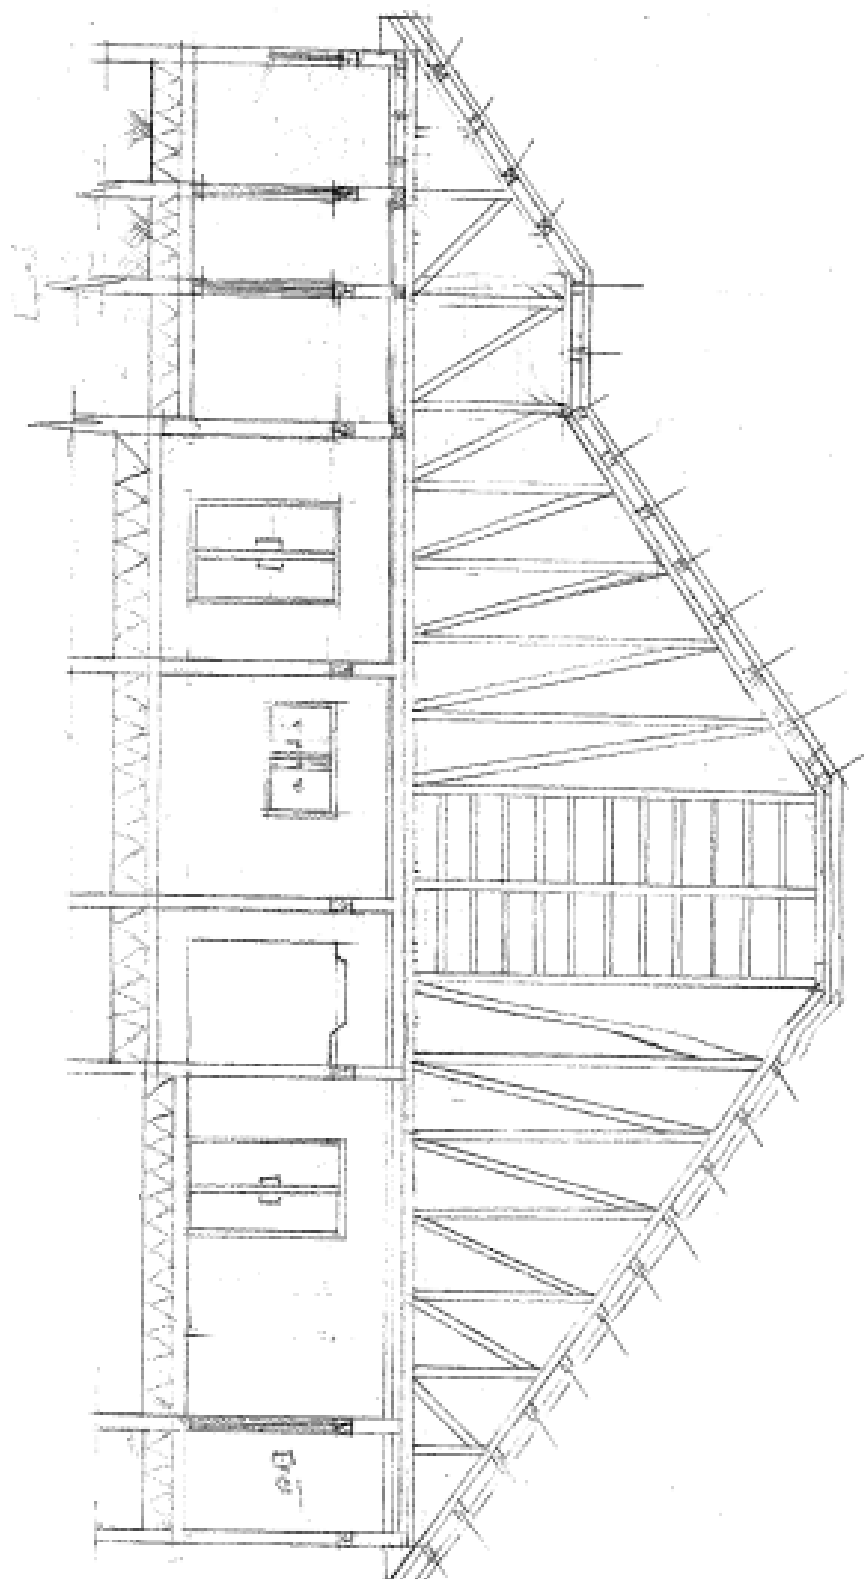

3rd

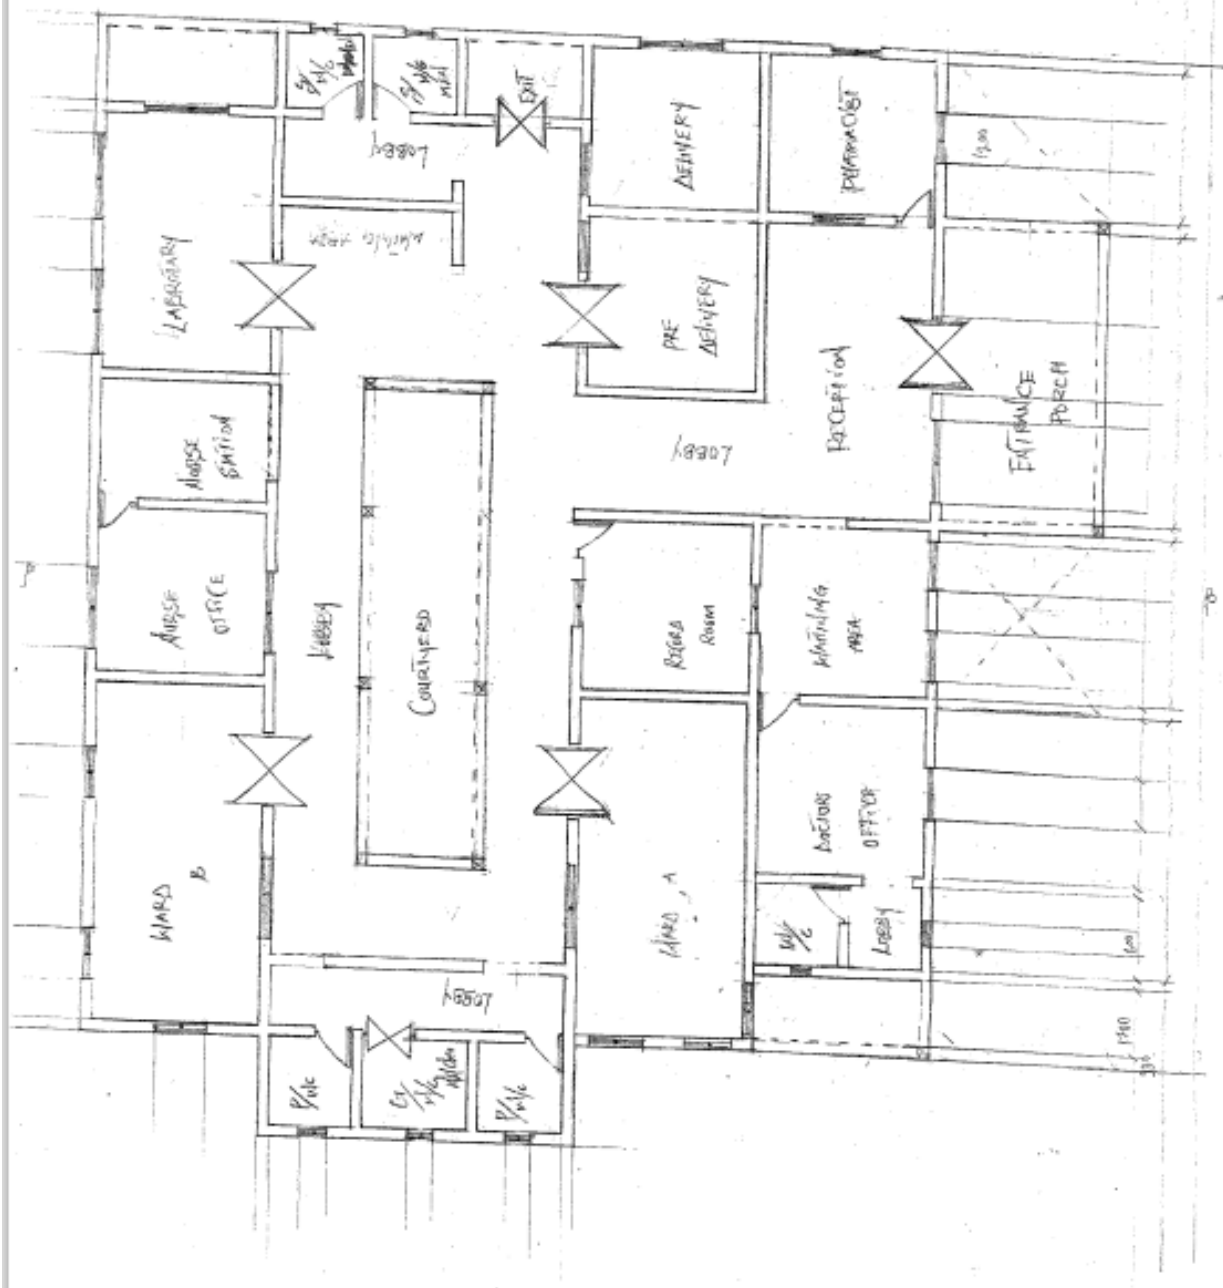

CHAPTER FOUR

4.0 SUMMARY, RECOMMENDATION AND CONCLUSION

4.1 PROBLEMS OBSERVED DURING MY PROGRAM

- i The time frame set for the program is too short as some of the aspects of the program were not completed.
- ii Lack of Financial support from the company to aid transportation to and from training.
- iii Attentions are not given to the IT students by the workers it is learn if you want to learn or ask if you want to know.

4.2 SUMMARY

One would state that the discipline is the training of the mind and body towards effective performance. The Students Industrial Work Experience Scheme (SIWES) is more or less achieving this fit. As it further builds on the theoretical classrooms leaving a practical approach of the industry and commerce to supply of finished goods and services. This program has enabled the participating students to be practically involved in the day-by-day activities of the industries and commerce.

Emphasis in the observation of industrial safety rules and regulations, time critical operation and proper man-hand management, quality cortices, etc. are daily activity objective. All those aimed at the production of marketable goods and services in the world of work.

However, to consolidate on the gains of this Industrial Training Fund (ITF) higher institution coordinator on SIWES program should be allowed making some suggestion and recommendation.

4.3 CONCLUSION

SIWES programme is very vital student especially undergraduates, because I come to see the SIWES programme provide an application of the theoretical knowledge learned by student in school to practical or real work situation. Also it is a medium where student from different higher institutions and department come together sharing idea there, by promoting an avenue for learning and them work.

4.4 RECOMMENDATIONS

Having being exposed to a bit of what entail working in an individual related to my course of study under SIWES programme I wish to make this recommendation

- i. Higher instruction of learning especially either institution and universities should establish link with comprise and establishment so as to provide space for student on industrial attachment, with the option of gaining employment in future, by doing so, it will go a long way in alleviating suffering and difficulties encountered by student in securing place for individual attachment.
- ii. Student should put money as the primary aim of going SIWES programme, there is more to learn than Bain allowance.

REFERENCE

- Chudley, R. (2005). *Construction technology* volume 2. Pearson Prentice Hall, New York.
- Edward, B. (2003). *The Effect of SIWES on a student*, Federal Ministry of Works, Lagos. Nigeria.
- Francis, K. (2012). *Building Construction Illustration*. (Fourth Edition). Wiley Publisher. ISBN-10: 9788126535637.
- Obande, M. (1990). *Blocklaying and Concreting*, 2nd Edition. Pearson Education Limited, Harlow United Kingdom. ISBN13 9780582025417.